
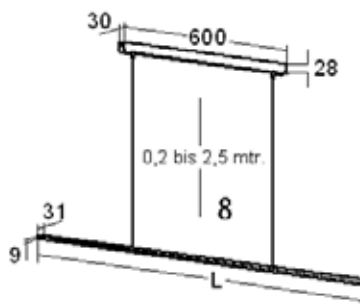

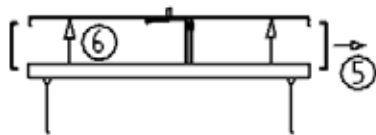


LED 150

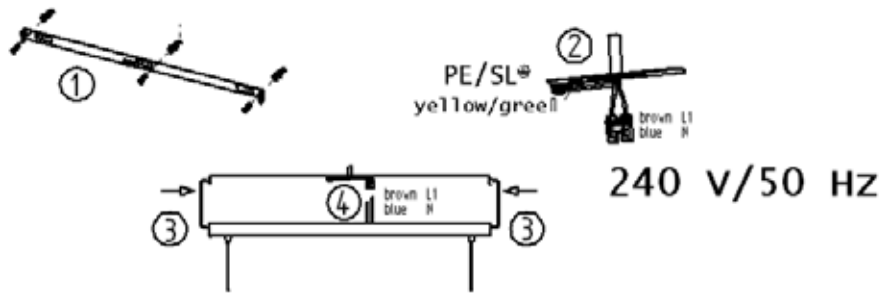

Lichtquellen sind nicht austauschbar  
Light sources are not interchangeable

**D**

! Achtung: Alle Montagearbeiten in spannungslosen Zustand durchführen. Bitte beachten Sie die jeweils gültigen VDE Richtlinien. Änderungen an den Elementen oder deren Bauteile sind nicht gestattet.

1. Montagewinkel anschrauben
2. Zuleitung 240 V/50 Hz L1/N/SL durch die im Montagewinkel vorhandenen Öffnungen führen und Schutzleiter ( grün/gelb ) an Erdungsschraube anklammern
3. Mittels beiliegenden Montagedrähren Baldachin an den Montagewinkel hängen gewünschte Länge der Abhängung einstellen: siehe 8 - Die Abhängung lässt sich mittels Seilstopper (8) individuell einstellen, Länger: Arretierung drücken - Kürzer Abhängeseil lässt sich, ohne die Arretierung zu betätigen, einschieben eine Feinjustierung lässt sich am Schluß auch im montierten Zustand durchführen

**Achtung:**

- Überschüssiges Abhängeseil nicht kürzen, sondern in den Baldachin aufgerollt einlegen. Die gesamte Seillänge wird benötigt, um die Stromzufuhr zur LED zu begrenzen Abhängung auf mindestens 200 mm und max. 2500 mm einstellen
4. Den braunen und blauen Draht der Zuleitung mit den braunen und blauen Draht der innenliegenden Anschlußklemme oder der Zuleitungsklemme verbinden
  5. Montagedrähre ( Aufhängung) entfernen
  6. Baldachin auf den Montagewinkel aufsetzen
  7. Baldachin mit Montagewinkel verschrauben und Feinjustierung ( siehe Punkt 3 und 8 ) durchführen

**Reinigungshinweis :**

Um Beschädigungen an der Oberfläche zu vermeiden, bitte keine Scheuermittel und Putzschwämme verwenden !!!!  
Verwenden Sie nur für Edelstahl geeignete silikonhaltige Reinigungsmittel

**UK**

! Attention: Carry out all assembly work in a de-energized state. Please observe the applicable VDE guidelines. Modifications to the elements or their components are not permitted.

1. screw on mounting bracket
2. lead the 240 V/50 Hz L1/N/SL supply cable through the openings in the mounting bracket and connect the protective earth conductor ( green/yellow ) to the grounding conductor. ( green/yellow ) to the grounding screw.
3. suspend the canopy from the mounting bracket using the enclosed mounting wires adjust the desired length of the suspension: see 8 - The suspension can be individually adjusted using the rope stopper (8), Longer: press arrestment - Shorter Suspension cable can be pushed in without pressing arrestment Fine adjustment can be carried out at the end even in the assembled state.

**Attention:**

- Do not shorten excess suspension rope, but place it rolled up in the canopy. The entire rope length is needed to limit the current supply to the LED.  
Adjust suspension to a minimum of 200 mm and a maximum of 2500 mm
4. connect the brown and blue wire of the supply cable with the brown and blue wire of the internal terminal block or the supply terminal
  5. remove mounting wires ( suspension)
  6. place canopy on the mounting bracket
  7. screw canopy to mounting bracket and perform fine adjustment ( see point 3 and 8 )

**Cleaning instructions :**

To avoid damage to the surface, please do not use abrasive cleaners and cleaning sponges !!!!  
Use only silicone-containing cleaning agents suitable for stainless steel